

IP65 Ruggedised 46" Wide Screen TFT Display



IP65 Ruggedised 46" Wide Screen TFT Display

The Ferrograph range of Rugged LCD-TFT displays are suitable for use in outdoor public areas offering unparalleled visual clarity, superior contrast and high luminance, making it ideal for the display of general information, advertising and transportation applications where high quality real time information delivery has to be achieved in demanding ambient light conditions.

KEY PRODUCT FEATURES

- TFT Display:** 46" high brightness TFT panel
1920 x 1080 FHD resolution
- Display:** Tough fabricated edge to edge enclosure with laminated chemically treated safety glass front screen, anti-glare / anti-reflective surface treatment rated to IP65.
- Heat Exchanger:** Heat exchanger cooling system to support high temperature extremes.
- Orientation:** Portrait or Landscape


DISPLAY

- Display Format:** 46" TFT, FHD 1920 x 1080 resolution.
- Aspect Ratio:** 16:9
- Brightness:** 2500cd/m2
- Contrast:** 5000:1
- Visible Display Area:** 1018.08mm x 572.67mm
- Viewing Angle:** 178 degrees horizontal and vertical, typical.
- TFT Backlight:** LED
- Display Colours:** 16.7M
- Protective Screen:** 8mm nominal laminated chemically treated safety glass with anti-glare coating

CONTACT US

Ferrograph | 1 New York Way | New York Industrial Park | Newcastle upon Tyne NE27 0QF
 T: +44 (0)191 280 8800 | E: info@ferrograph.co.uk | W: www.ferrograph.com | @ferrograph

IP65 Ruggedised 46" Wide Screen TFT Display

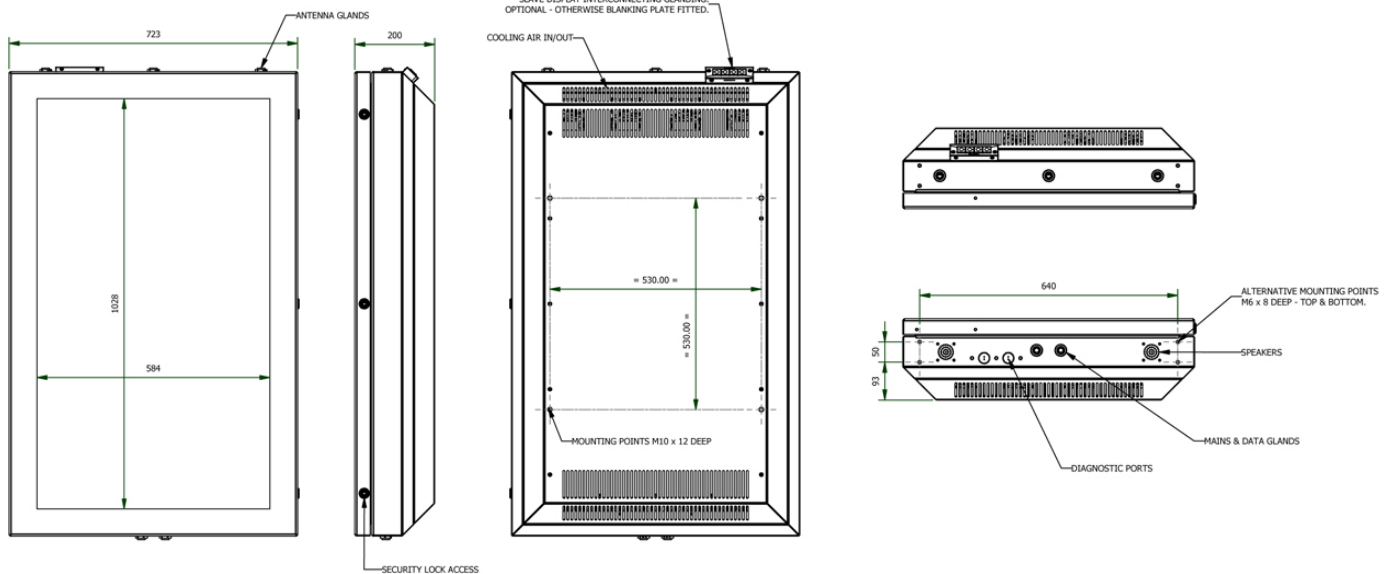

ELECTRICAL

Voltage Source: 110 - 230VAC 50 Hz, + 10%, - 6%.
Power Consumption: 300 Watts. Typical, (1300 Watts Max).

Ingress Protection: IP65
Impact Protection: IK08
Dimensions: 1164mm x 723mm x 200mm.
Fixings: M10 x 4, 530mm centres on rear face
Weight: 70kg approx

ENVIRONMENTAL

Temperature: -20°C + 40°C
Humidity: 10% to 90%

INTEGRATED COMPUTER

Platform: Standard Atom D2550 NM10 (ECM-CDV).
Operating System: Windows 7 embedded.
Connectivity: LAN connection, Integrated 3G/4G modem or Wi-Fi WAN networks as options.

DISPLAY ENCLOSURE

Enclosure: Fabricated aluminium enclosure with polyester powder coating
Control: Full diagnostic facilities including internal temperature and status monitoring and impact detection.
Environmental: Heat control elements and heat exchanger to meet specified temperature extremes.
Audio: 2 x 2W rated speakers with amplifier.

ADDITIONAL OPTIONS

Platform upgrade: Intel Core i7-4700EQ upgrade available with Saffron display driver.
REACT 3: Optional
Finish: Powder coating paint finish and vinyl graphics to customer specification.
Touch Screen: Capacitive film touch screen to allow customer interaction

CONTACT US

Ferrograph | 1 New York Way | New York Industrial Park | Newcastle upon Tyne NE27 0QF
 T: +44 (0)191 280 8800 | E: info@ferrograph.co.uk | W: www.ferrograph.com | @ferrograph